

# MARION COUNTY SURVEYOR'S OFFICE



## SECTION CORNER RECORD

DEBRA S. JENKINS  
MARION COUNTY SURVEYOR

SEC. 22 TWN. 14<sub>N</sub> RNG. 2<sub>E</sub>

BRYAN F. CATLIN, PLS  
TECHNICAL SUPERVISOR

Date: 4-13-10  
Party Chief: Wilcoxen  
Crew: Finney  
Type of Marker: Harrison  
Method of Establishment: County: 5-11-1993  
IN S.P.C. E Zone, NAD 83 (1986)  
Name: 14022205  
N: 487 737.089 3(m)  
E: 45 825.747 9(m)

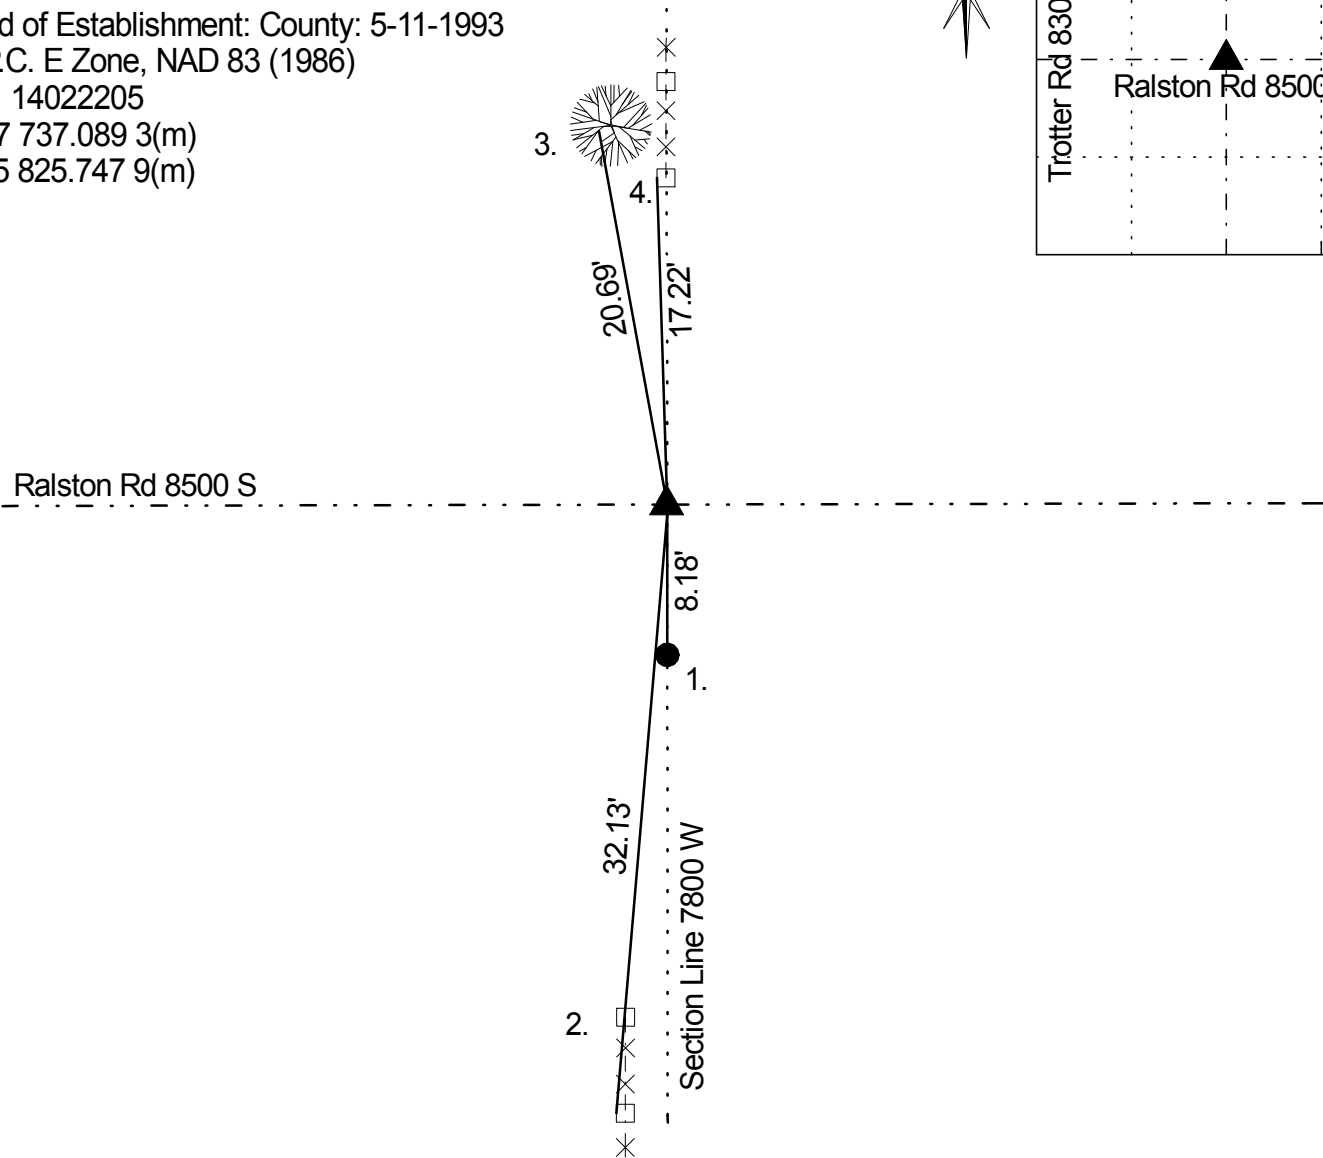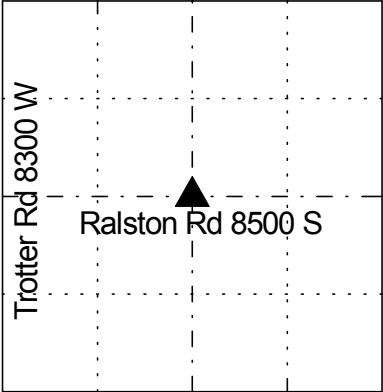

A survey by H.B. Fatout 9-24-1877 indicates a set rock w/witnesses: rock S 59¾ W 31½ links, rock N 35½ E 42 links per Decatur Township Legal Survey Book pg. 31. Gioscio 11-28-1949 called a stone. McLand 1-13-75 called a PK nail. Wilcoxen 4-28-78 called a RR spike fd and set an iron pin. Wilcoxen 3-14-83 called a stone. Greene 8-5-86 called a stone. Wilcoxen 5-11-93 called a PK nail over stone. Excavated by Kiste 4-27-2000 and called a stone fd 3" down with cut 'x'. Harrison set. Retied 1-31-2005 by Kiste. Retied 4-13-10 by Wilcoxen.

THIS CORNER POSITION  
REPRESENTS A "TITLE" CORNER  
AND MAY NOT NECESSARILY  
REPRESENT THE POSITION BASED  
ON RECORD CORNERS.

REF	DISTANCE	DESCRIPTION
1.	8.18'	Rebar at S edge of pavement
2.	32.13'	2nd post S
3.	20.69'	Boat spike W 40" cherry 6" up
4.	17.22'	Road nail W fence post 2" up